





— Mark 1 —
MOTORCYCLE HELMET
USER GUIDE





ENGLISH

GUIDE AVAILABLE IN OTHER
LANGUAGES ON OUR WEBSITE

www.veldt.xyz/guides

INTRODUCTION

CAUTION

**REFLECTIVE STICKERS
REPAINTING
DAMAGES**

HOW TO

**CHOOSE THE RIGHT SIZE
ADJUST YOUR FIT
FASTEN THE CHINSTRAP
INSERT AND SCREW**

VISOR

**PRESENTATION
INSTALLATION
REPLACE THE SHIELD
PINLOCK®**

CHIN GUARD

**PRESENTATION
INSTALLATION**

MAINTENANCE

**CLEANING
REPLACEMENT**

MARKING

IDENTIFICATION

SPECIAL ORDERS

CERTIFICATIONS

GUARANTEE


INTRODUCTION

THANK YOU FOR PURCHASING A VELDT HELMET.


NO HELMET CAN GUARANTEE ABSOLUTE SAFETY. YOUR HELMET'S FUNCTION IS TO REDUCE THE CHANCE OR SEVERITY OF INJURY IN AN ACCIDENT. SOME REASONABLY FORESEEABLE IMPACTS MAY EXCEED ANY HELMET'S ABILITY TO PROTECT AGAINST INJURY. PLEASE BEAR THIS IN MIND AND RIDE SAFELY.

THIS HELMET IS FULLY HANDMADE. IT USES MATERIALS OF THE BEST QUALITY, CAREFULLY HANDPICKED. AS LIGHT AS IT COMES, ITS CARBON FIBRE SHELL IS ALSO VERY PROTECTIVE. THE PADDING IS MEANT TO BE AS DURABLE AS IT IS COMFORTABLE.

'FORM FOLLOWS FUNCTION'. EVERY FEATURE ON THIS HELMET IS A RESPONSE TO A SAFETY OR A COMFORT CONCERN. SLICK, LIGHT AND STRONG, THE VELDT HELMET CAN ALSO BE CUSTOMIZED FROM A HUGE RANGE OF COLOURS AND PATTERNS.

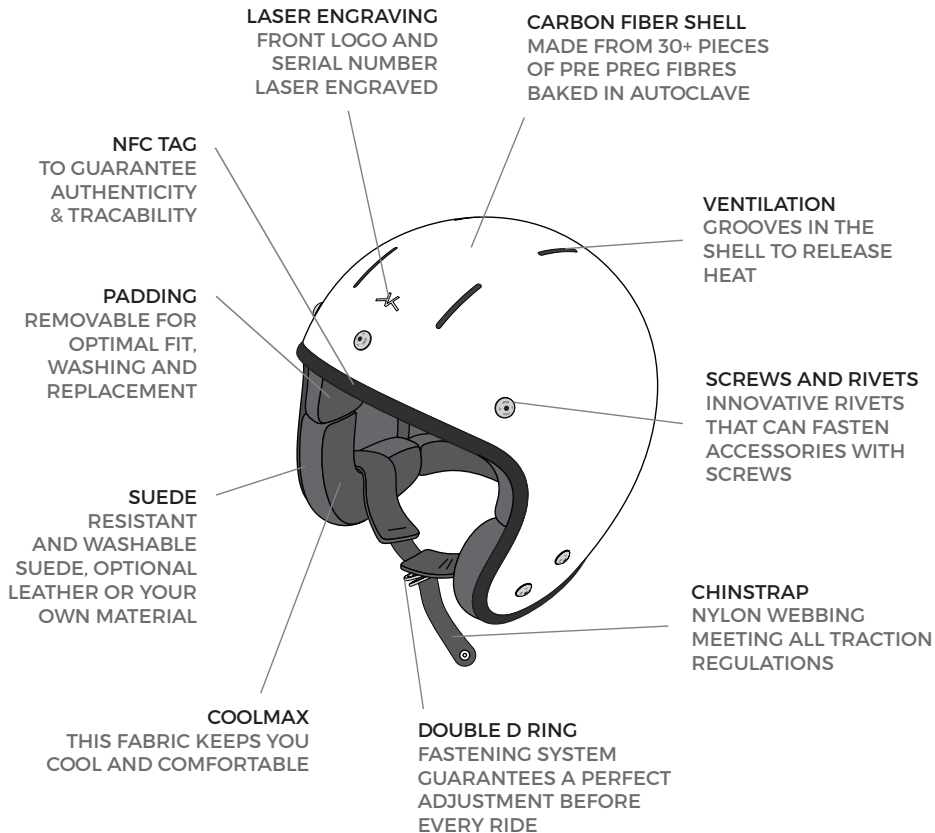


CAUTION
REFLECTIVE STICKERS

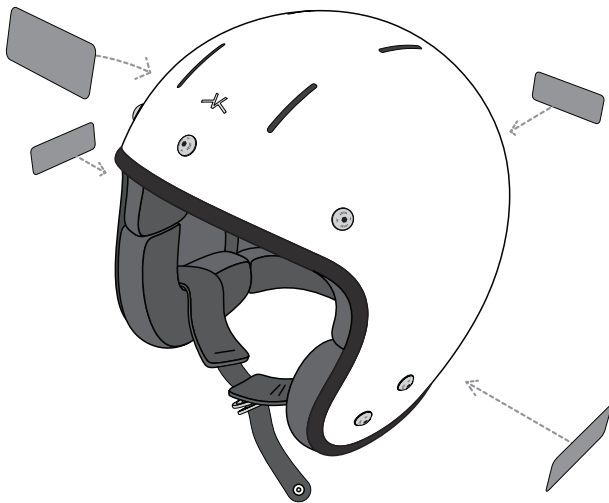


BEFORE USING YOUR HELMET FOR THE FIRST TIME, REGULATIONS MAY REQUIRE THAT YOU PLACE REFLECTIVE STICKERS ON ALL FOUR SIDES. STICKERS ARE PROVIDED IN THE BOX WITH YOUR HELMET.

CAUTION
REPAINTING

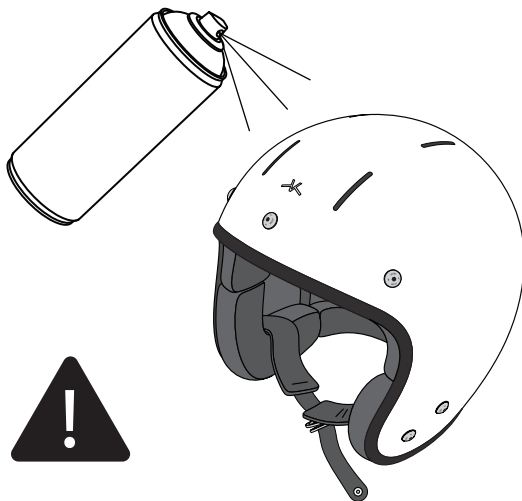

IF YOU WOULD LIKE TO PAINT YOUR HELMET, USE AIR-DRYING PAINT ONLY, NOT PAINTS THAT REQUIRE HEAT CURING. DO NOT REMOVE ANY COMPONENTS, SUCH AS THE EPS LINER, CHINSTRAPS OR RIVETS. MAKE SURE TO PROTECT THE WHOLE OF THE INSIDE OF THE HELMET FROM THE SPRAY AS PAINT CAN DAMAGE THE LINING AND SOME PARTS.

CAUTION DAMAGES

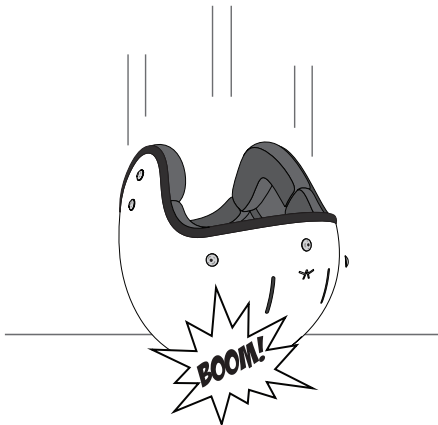


YOUR HELMET IS CONSTRUCTED SO THAT THE ENERGY OF A SEVERE IMPACT IS ABSORBED THROUGH PARTIAL DESTRUCTION OF THE SHELL AND/OR LINER. AFTER SUCH AN IMPACT, THE STRUCTURE OF THE HELMET MAY BE DAMAGED AND MAY NO LONGER PROVIDE SUITABLE PROTECTION. DO NOT USE A DAMAGED HELMET. A VISUAL CHECK IS NOT ENOUGH TO CONFIRM THE CONDITION OF THE PROTECTIVE LINER. WE RECOMMEND THE USE OF THIS HELMET FOR NO MORE THAN FIVE YEARS AFTER FIRST USE, EVEN IF THE HELMET DOES NOT APPEAR DAMAGED.



TO AVOID DAMAGE, NEVER EXPOSE THE HELMET TO EXCESSIVE HEAT. NEVER EXPOSE IT TO STRONG SUNLIGHT NEAR WINDOWS OR ENCLOSED AREAS SUCH AS THE BACK SHELF OF A CAR.

HOW TO CHOOSE THE RIGHT SIZE

FOR MAXIMUM SAFETY, MAKE SURE YOU USE A HELMET THAT IS THE RIGHT SIZE FOR YOU. IT MUST NOT BE SO LARGE THAT IT MOVES FREELY AROUND YOUR HEAD, AND NOT SO SMALL THAT IT CAUSES PAIN OR DISCOMFORT. A HELMET WHICH IS TOO LARGE MAY SLIDE DOWN OVER YOUR EYES, OR TURN IN A LATERAL DIRECTION DUE TO MOVEMENT DURING RIDING. WHEN YOU TRY TO MOVE THE HELMET ON YOUR HEAD THE SKIN SHOULD BE PULLED BY THE LINING. IF THE LINING SLIPS EASILY OVER THE SKIN THE HELMET MAY BE TOO LARGE.




EACH HEAD IS UNIQUE AND THE BEST WAY TO FIND YOUR HELMET SIZE IS TO TRY IT ON.

HOWEVER, YOU CAN MEASURE THE CIRCUMFERENCE OF YOUR HEAD FROM 2,5 CM (OR 1 INCH) ABOVE THE EYEBROWS THEN USE THE SIZE TABLE BELOW TO FIND YOUR SIZE.


SIZE	XS	S	M	L	XL	XXL
CM	53/54	55/56	57/58	58-59	60-61	62-64

HOW TO ADJUST YOUR FIT

AS EACH HEAD IS UNIQUE, WE OFFER DIFFERENT PADDING IN THE BOX TO PERFECT THE FIT OF YOUR HELMET. YOU MAY HAVE TO TRY DIFFERENT COMBINATIONS TO FIND THE RIGHT ONE FOR YOU.







FOR THE CIRCUMFERENCE YOU CAN ADJUST THE FRONT, THE REAR, THE TOP, AND BOTH SIDES. TO ADJUST YOUR FIT, THESE PADDING ARE PLACED ON VELCRO TAPE, YOU JUST HAVE TO REMOVE THE CURRENT ONE AND PLACE THE NEW ONE ON THE SAME POSITION.



TO REPLACE THE CHEEKS, JUST PULL ON THE VELCRO TAPE, AND REMOVE THE CHEEKS FROM THE LINING. THEN JUST PUSH THE REAR AND THE TOP FLAP UNDER THE LINING, ALIGN, AND PUSH ON IT TO FIX THE VELCRO TAPE.


IF YOUR HEAD FITS A VELDT HELMET BUT YOU CANNOT ACHIEVE A PERFECT FIT WITH THE PADDING AND CHEEKS WE HAVE PROVIDED PLEASE CONTACT US AT CONTACT@VELDT.XYZ OR VISIT ONE OF OUR DEALERS AND WE WILL TRY TO FIND A SOLUTION.

HOW TO FASTEN THE CHINSTRAP

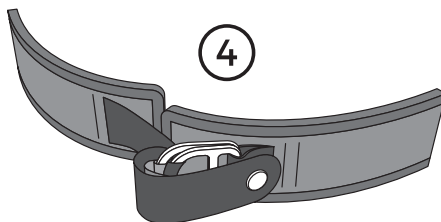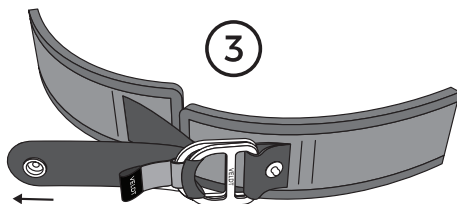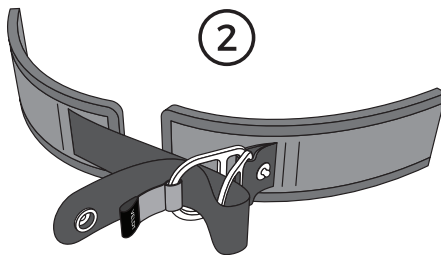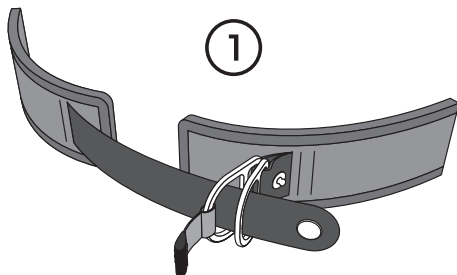

NEVER HOLD THE HELMET WITH ONLY THE CHINSTRAP'S ANTI-FLAPPING SNAP FASTENED. ALWAYS FASTEN THE CHINSTRAP WITH D-RINGS WHEN THE HELMET IS NOT IN USE. TO TRANSPORT YOUR HELMET USE THE BAG PROVIDED.

HOW TO INSERT AND SCREW



ON THE VELDT HELMET WE DESIGNED A SYSTEM WITH SCREWS AND INSERTS TO MOUNT DIFFERENT ACCESSORIES. THIS SYSTEM ALLOWS YOU TO MOUNT A CHIN GUARD AND / OR A VISOR, WITHOUT ALTERING THE SIMPLE SHAPE OF A TRADITIONAL OPEN FACE, IF YOU REMOVE THEM.

BE CAREFUL, USE ONLY THE WRENCH PROVIDED WITH THE HELMET TO UNSCREW/SCREW. AS INSERTS ARE MADE OF LIGHT MATERIALS TO REDUCE THE WEIGHT, THEIR THREAD COULD BE STRIPPED IF NOT HANDLED WITH CARE.


DUE TO VIBRATIONS WHEN RIDING, PLEASE CONTROL ALL SCREWS AND RETIGHTEN THEM WHEN NECESSARY.




TO AVOID UNPLEASANT NOISES, REDUCE AIRFLOW AND WATER COMING INSIDE THE HELMET YOU SHOULD KEEP SCREWS ON WHEN RIDING, EVEN WITHOUT ACCESSORIES.

VISOR PRESENTATION

YOU CAN ADD AN ARTICULATED SHIELD ON YOUR VELDT HELMET, WITHOUT CHANGING THE SIMPLE OPEN FACE DESIGN. THE SHIELD IS MOUNTED ON A PLASTIC FRAME, ITSELF SCREWED ON THE SHELL. WE OFFER A CHOICE OF THREE STANDARD SHIELDS : CLEAR, LIGHT-SMOKE AND DARK-SMOKE, BUT OTHER COLORS ARE AVAILAIBLE ON DEMAND. FOR YOUR SAFETY, PLEASE USE TINTED SHIELDS DURING DAYLIGHT ONLY.




LONG JET SHIELD




SHORT FULLFACE SHIELD

USE A SOLUTION OF MILD SOAP OR DETERGENT AND LUKEWARM WATER TO CLEAN BOTH THE INSIDE AND OUTSIDE. RINSE WELL WITH CLEAN WATER, AND WIPE OFF WITH THE CLOTH PROVIDED. NEVER USE PETROL OR ANY OTHER SOLVENTS AS THESE CAN AFFECT THE SHIELD.


VISOR INSTALLATION




REMOVE THE THREE SCREWS
ON THE TOP OF THE HELMET
WITH THE PROVIDED WRENCH

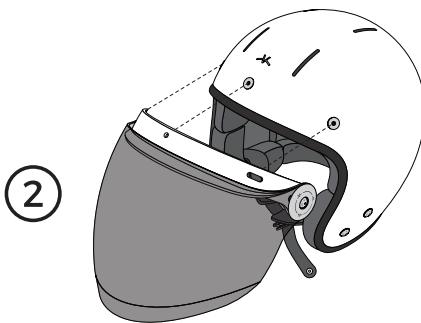

PLACE THE VISOR ON THE SHELL,
AND ALIGN THE FRAME'S MIDDLE
HOLE WITH THE MIDDLE RIVETS




PLACE THE MIDDLE SCREW FIRST
TO MOUNT THE FRAME BUT DON'T
TIGHTEN IT TO THE MAXIMUM

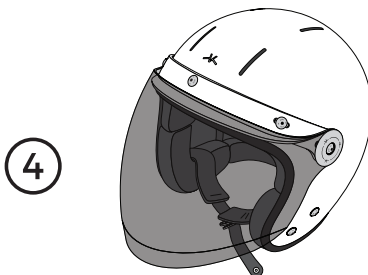


PLACE OTHER SCREWS CAREFULLY, AND
TIGHTEN ALL OF THEM STEP BY STEP TO
TIGHTEN THE FRAME ON THE SHELL

VISOR


REPLACE THE SHIELD

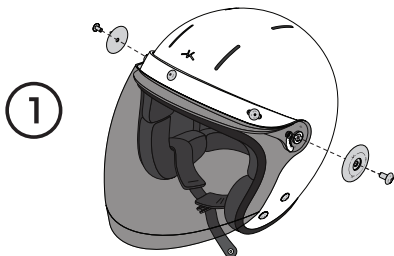


REMOVE SCREWS AND PIVOTS
ON EACH SIDE OF THE FRAME,
WITH THE WRENCH PROVIDED

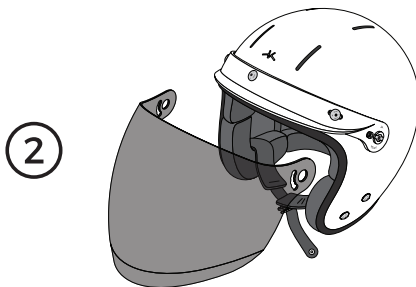

PULL THE REAR OF THE SHIELD
OUT OF THE FRAME ON EACH
SIDE AND REMOVE THE SHIELD



PLACE THE NEW SHIELD ON THE
FRAME AND PLACE EACH SIDE
AROUND THE PIVOT POSITION AXIS

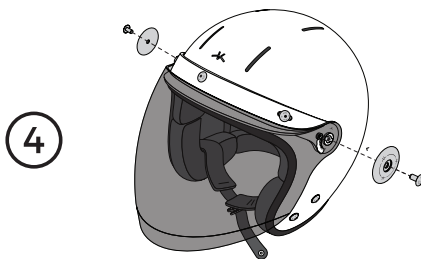

PLACE BOTH PIVOTS AND SCREWS
BACK ON THE FRAME AND TIGHTEN
THEM CAREFULLY TO HOLD THE VISOR

VISOR
PINLOCK®



THE PINLOCK® SYSTEM WORKS BY UTILIZING A SILICONE BEAD TO CREATE AN AIRTIGHT SEAL BETWEEN THE MOISTURE ABSORBING PINLOCK® LENS MATERIAL AND THE HARD-COATED SHIELD. IF THERE IS ANY GAP BETWEEN THE SILICONE BEAD AND THE SHIELD SURFACE, THE PINLOCK® SYSTEM WILL NOT FUNCTION. TO INSTALL OR REMOVE THE PINLOCK® LENS, FOLLOW INSTRUCTIONS ON THE OFFICIAL PINLOCK® WEBSITE: [HTTP://PINLOCK.COM/SUPPORT](http://pinlock.com/support)

EACH PINLOCK® LENS IS DESIGNED TO WORK WITH A SPECIFIC SHIELD. BE SURE TO USE A GENUINE VELDT SHIELD EQUIPPED WITH ECCENTRIC PINS AND GENUINE PINLOCK® LENS.


REMOVE THE PROTECTIVE FILM BEFORE USING THE PINLOCK® LENS FOR THE FIRST TIME.

DO NOT USE TINTED PINLOCK WITH A TINTED VISOR. NEVER USE TINTED PINLOCK® LENS AT NIGHT.

TO CLEAN THE PINLOCK®, REMOVE THE LENS FROM THE SHIELD AND CLEAN WITH A SOLUTION OF MILD SOAP AND WATER. RINSE WELL WITH PURE WATER THEN WIPE WITH THE PROVIDED SOFT CLOTH.

FOR MORE INFORMATION AND SUPPORT, VISIT THE OFFICIAL PINLOCK® WEBSITE : [HTTP://PINLOCK.COM/SUPPORT](http://pinlock.com/support)

CHINGUARD PRESENTATION

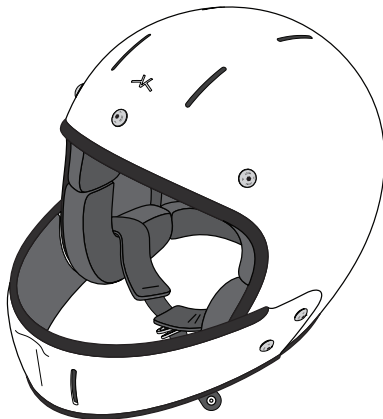


YOU CAN GET FULL FACE PROTECTION BY ADDING OUR SCREWABLE CARBON CHINGUARD. THIS ASSEMBLY HAS BEEN TESTED AND OFFERS YOU A CERTIFIED FULL FACE PROTECTION.




BEFORE RIDING, BE SURE THAT THE CHIN GUARD IS WELL MOUNTED WITH ALL FOUR SCREWS WELL TIGHTENED. NEVER RIDE WITH A MISSING SCREWS. REGULARLY CONTROL ALL SCREWS AND RETIGHTEN THEM IF NECESSARY.


CHINGUARD INSTALLATION




REMOVE ALL FOUR SCREWS
ON EACH SIDE OF THE HELMET
WITH THE PROVIDED WRENCH

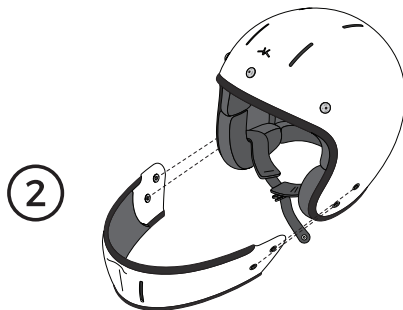

PLACE THE CHIN ON THE SHELL AND
ALIGN ALL CHIN RIVETS WITH THE
CORRESPONDING RIVET ON THE SHELL



PLACE BOTH TOP SCREWS ON
EACH SIDES, BUT DON'T TIGHTEN
THEM TO THE MAXIMUM

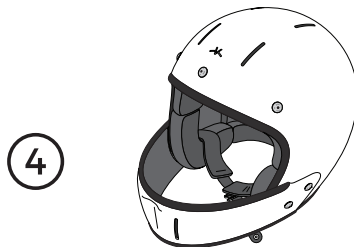

PLACE BOTH OTHER SCREWS, AND
TIGHTEN ALL OF THEM STEP BY STEP TO
TIGHTEN THE CHINGUARD ON THE SHELL

MAINTENANCE

CLEANING

USE A SOLUTION OF MILD SOAP OR DETERGENT AND LUKEWARM WATER TO CLEAN BOTH THE INSIDE AND OUTSIDE OF YOUR HELMET AND SHIELD. RINSE WELL WITH CLEAN WATER, AND WIPE OFF WITH THE CLOTH PROVIDED.

NEVER USE PETROL OR ANY OTHER SOLVENTS AS THESE CAN AFFECT THE SHOCK ABSORBING LINER AND OTHER COMPONENTS.

DRY THE HELMET AND SHIELD AT ROOM TEMPERATURE AND NEVER EXPOSE THEM TO EXCESSIVE HEAT.

IF USING SPRAY-ON WAX OR POLISH, DO NOT SPRAY DIRECTLY ON THE HELMET, BUT SPRAY LIGHTLY ONTO THE CLOTH PROVIDED AND APPLY TO THE HELMET WITH THIS CLOTH ONLY TO AVOID SCRATCHES.


REPLACEMENT

AFTER A CERTAIN PERIOD OF USE, MATERIAL IN CONTACT WITH YOUR HEAD COULD BE COMPACTED, AND THE ORIGINAL FIT COULD BE AFFECTED.


YOU CAN ORDER CHEEKS AND PADDING PARTS ON OUR WEBSITE TO REPLACE YOUR INTERIOR.

MARKING

ALL VELDT HELMETS ARE ENGRAVED AT THE LAST STEP OF THE PRODUCTION WITH A LASER MACHINE. THIS ENGRAVING IS UNIQUE AND SPECIFIC TO EACH HELMET. IT GUARANTEES THE AUTHENTICITY OF THE PRODUCT.

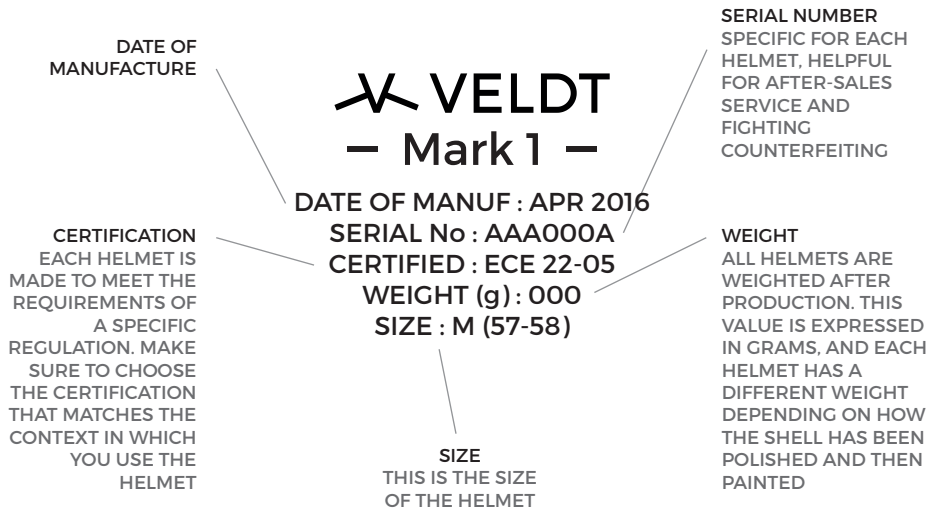

IDENTIFICATION

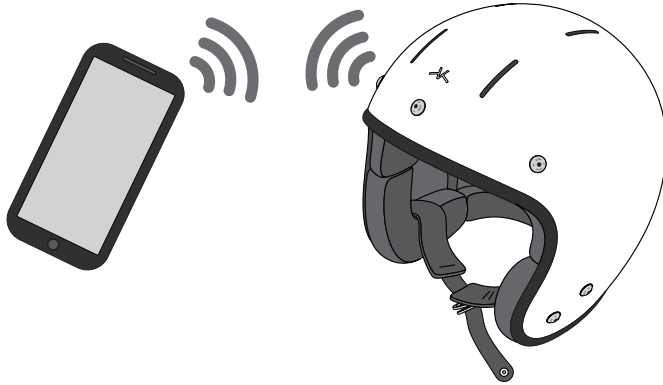

WE IMPLANTED A NFC PASSIVE TAG INSIDE YOUR VELDT HELMET TO FACILITATE CUSTOMER FOLLOW-UP AND TO BETTER FIGHT COUNTERFEITING.

WITH YOUR SMARTPHONE AND ANY NFC APPLICATION, YOU CAN SCAN YOUR HELMET NEAR THE FRONT VELDT LOGO, AND IT WILL RETURN YOUR HELMET INFORMATION.

SPECIAL ORDERS



YOU CAN MAKE YOUR OWN HELMET DESIGN BY CHOOSING FROM THE OPTIONS AVAILABLE ON WWW.VELDT.XYZ/CONFIGURATOR

IF THAT IS NOT ENOUGH, CONTACT US AT CONTACT@VELDT.XYZ AND YOU WILL BE ABLE TO :

- PROVIDE US DIFFERENT INTERIOR MATERIALS
- COVER THE SHELL WITH EXOTIC LEATHERS OR SPECIFIC FABRIC
- PROVIDE A SPECIFIC GRAPHIC DESIGN OR PAINT
- CHOOSE DIFFERENT METAL FINISHES
- CHOOSE THE TRIM MATERIAL AND COLOR
- ENGRAVE A SPECIAL TEXT OR LOGO

CERTIFICATION

YOUR VELDT HELMET EXCEEDS ALL REQUIREMENTS OF THE APPLICABLE STANDARD, AND WHEN APPLICABLE IT HAS BEEN CERTIFIED BY THE AUTHORIZED ORGANIZATION

GUARANTEE

OUR MISSION IS TO BUILD THE BEST POSSIBLE HELMET, AND WE TRY TO USE THE MOST ADVANCED MATERIALS AND TECHNOLOGY TO PROTECT YOUR HEAD.

VELDT HELMETS HAVE A FIVE-YEAR GUARANTEE AGAINST DEFECTS ON MATERIALS OR MANUFACTURE.

IF THE PRODUCT SHOWS VISIBLE DEFECTS EITHER IN THE MATERIALS OR THE MANUFACTURE DURING THE GUARANTEE PERIOD, PLEASE CONTACT US BY EMAIL AT CONTACT@VELDT.XYZ

VELDT'S LIABILITY IS LIMITED TO THE COST OF REPAIR AND/OR THE REPLACEMENT OF THE ITEM DURING THE GUARANTEE PERIOD. WE WILL REPLACE OR REPAIR THE HELMET THAT IS DEFECTIVE DUE TO PROPER USE.

THIS GUARANTEE IS LIMITED TO THE ORIGINAL PURCHASER ONLY. IT DOES NOT APPLY 1) IF DETERIORATION IS NOT A RESULT OF DEFECTS IN THE MANUFACTURING PROCESS 2) IMPROPER REPAIRS OR MODIFICATIONS BY THE PURCHASER OR A THIRD PARTY 3) INADEQUATE FIT 4) IF USED OTHER THAN INTENDED 5) IF PRODUCTS HAVE AN ILLEGIBLE SERIAL NUMBER.

THANK YOU FOR YOUR CONFIDENCE

VELDT LTD
11 HOPE STREET
DOUGLAS
ISLE OF MAN
IM1 1AQ
BRITISH ISLES

CONTACT@VELDT.XYZ

WWW.VELDT.XYZ

